# Eccentric Quick Clamps • with screw 23390.0111



## **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### Material

### Support washer

· Thermoplastic POM, glass-fiber reinforced

· Zinc die-cast, plastic coated, black, similar to RAL 9005

## Inner parts

· Steel, zinc-plated by galvanization


### Screw


• Steel, zinc-plated by galvanization

#### Adjusting nut

Steel, zinc-plated by galvanization

### **Drawing**






### **Order information**

Dimensions								Stroke	<b>B</b> :	I	Art. No.
ı	d <sub>2</sub>	h <sub>1</sub> max. in clamping position	d <sub>3</sub>	d <sub>4</sub>	h <sub>2</sub> max.	Regulating- range h <sub>3</sub> min.	b	s at 90° lever position	max.		
[mm]								[mm]	[°C]	[g]	
with screw, adjustable – picture 2, Steel											
63	М6	25	16	19	16.4	1.5	16	0.75	80	72	23390.0111



Halder, Inc. www.halderusa.com

# **Application example**

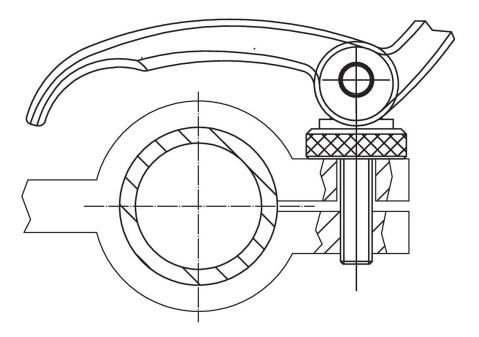

# Compliance

# RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Halder, Inc.

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2

Published on: 4.2.2024