# Height-Adjusting Elements 25120.0034



#### **Product Description**


For levelling of machines and installations.


For vertical adjustment, the self-locking height-adjusting elements are fitted with a fine-pitch thread. All elements have a throughgoing bore for fastening purposes. A turn-out lock serves as height limit for the maximum adjustment height.

#### Material

 Heat-treated steel, zinc-plated by galvanization, chromalized

### Drawing







## Order information

Dimensions					Stroke	For screw	Load capacity	Load capacity	<b>I</b>	Art. No.
d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	ե	l <sub>2</sub>	I <sub>3</sub>		for static load	max.	_	
			~	~	~		max.			
[mm]					[mm]	[mm]	[kN]	[kN]	[g]	
22	58	M40 x 1,5	28	37	9	M20	210	90	392	25120.0034

#### Accessories

sickle spanner for vertica	For height adjusting element size d <sub>2</sub> [mm] al adjustment	Dimensions of sickle spanner DIN 1810, form A [mm]	<b>a</b>	Art. No.
	58	58 - 62	250	25120.0984



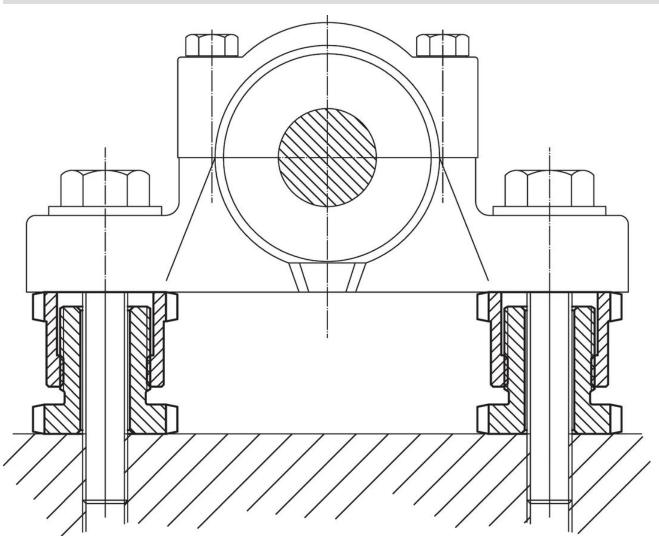

#### Compliance

#### **RoHS compliant**

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

#### **Does not contain Proposition 65 substances**

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.