# Height-Adjusting Elements ⋅ high 25120.0126



## **Product Description**


For levelling of machines and installations.


For vertical adjustment, the self-locking height-adjusting elements are fitted with a fine-pitch thread. All elements have a throughgoing bore for fastening purposes. A turn-out lock serves as height limit for the maximum adjustment height.

#### Material

· Heat-treated steel, zinc-plated by galvanization, chromalized

## Drawing





## **Order information**

Dimensions					Stroke	For screw	Load capacity	Load capacity	I	Art. No.
d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	I <sub>1</sub>	l <sub>2</sub>	I <sub>3</sub>		for static load	max.	_	
			~	~	~		max.			
		[mm]	'		[mm]	[mm]	[kN]	[kN]	[g]	
17.5	45	M30 x 1,5	42	67	25	M16	120	45.5	326	25120.0126


#### **Accessories**

	For height adjusting element size d <sub>2</sub>	Dimensions of sickle spanner DIN 1810, form A	i	Art. No.
	[mm]	[mm]	[9]	
sickle spanner for vertical	al adjustment			
	45	45 – 50	156	25120.0983



Halder, Inc. www.halderusa.com

### **Application example**

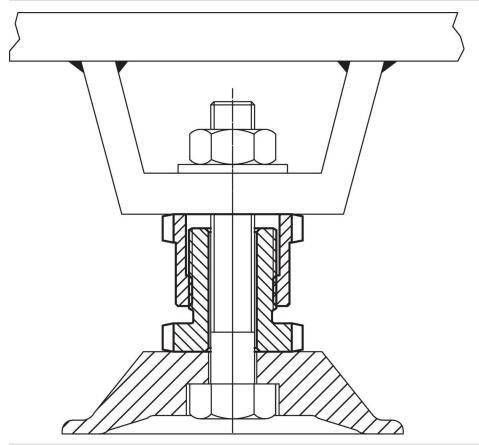

### Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Halder, Inc.

## Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2

Published on: 4.2.2024