Ball Lock Pins • self-locking, with standard handle 22370.0036



Halder, Inc.

www.halderusa.com Page 1 of 4 Published on: 7.4.2024



## **Product Description**

For quick fastening, locking, adjusting, changing and securing. Quickly and easily unlockable for frequently repeated connections.

All versions are corrosion resistant. When using stainless steel 1.4542: high-strength, hardened, abrasion resistant pin with high load capacity. Compact design with standard handle.

#### Material

#### Pin part

Stainless steel 1.4305

## **Spring**

Stainless steel

#### Operation

The balls are unlocked by pressing the button.

#### Characteristic

Types from stainless steel 1.4542 with marking below the balls.

## More information

#### **Notes**

Special types on request.


#### **Accessories**

Can easily be fitted with retaining cable EH 22400.

### **Further products**

- Ball Lock Pins, self-locking, with standard handle, titanium
- Locating Bushings, for ball lock pins and socket pins
- Locating Bushings, with flange, for ball lock pins and socket pins
- Retaining Cables
- Positioning Bushings, with collar, DIN 172 A
- Positioning Bushings, without collar, DIN 179 A

# **Drawing**

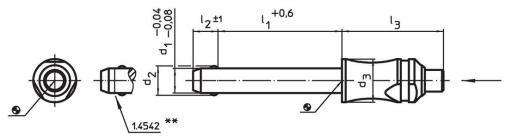

<sup>\*\*</sup> Types from stainless steel 1.4542 with marking.

## **Order information**

| Dimensions                              |      |                |                |                      |                | Location hole |      | I   | Shearing resistance,         | Art. No.   |
|---|------|----------------|----------------|----------------------|----------------|---------------|------|-----|------------------------------|------------|
| <b>d</b> <sub>1</sub><br>-0.04<br>-0.08 | +0.6 | d <sub>2</sub> | d <sub>3</sub> | l <sub>2</sub><br>±1 | l <sub>3</sub> | H11           | max. |     | two-shear <sup>1)</sup> min. |            |
| [mm]                                    |      |                |                |                      |                | [mm]          | [°C] | [g] | [kN]                         |            |
| Stainless steel                         |      |                |                |                      |                |               |      |     |                              |            |
| 8                                       | 30   | 9.5            | 14             | 8.2                  | 33.1           | 8             | 250  | 36  | 38                           | 22370.0036 |


<sup>1)</sup> Shearing resistance similar to DIN 50141

# **Application example**



Halder, Inc.

www.halderusa.com Page 3 of 4
Published on: 7.4.2024

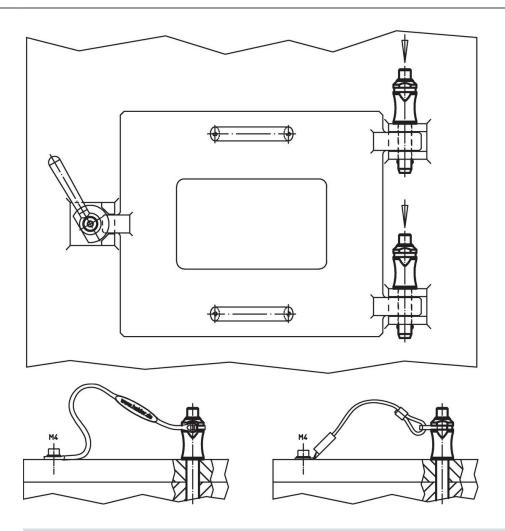

## Compliance

## **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Halder, Inc.

#### **Does not contain Proposition 65 substances**

No Proposition 65 substances included.

https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 4 of 4

Published on: 7.4.2024