Self-Aligning Pads 22730.0130



Product Description

Self-aligning pads are used as stop, support and thrust pad and are suitable for installation in clamping elements.

Material

Ball

• Stainless steel 1.3541, nickel-plated

Body


· Stainless steel 1.4057, heat-treated

More information


Notes

Ball protected against rotating. Loading capacity valid for steel and stainless steel designs.


Drawing




picture 1



picture 3



picture 2



picture 4


Order information

Dimensions							Load capacity	Tightening	I	Art. No.
d ₁	d ₂	d ₃	l ₁	l ₂	Ball diameter		for static load	torque	_	
				-0.5			max.	max.		
[mm]						[mm]	[kN]	[Nm]	[g]	
with male thread, flat-faced ball, bearing surface plain – picture 1, Stainless steel										
30	M16	20	27	16	25	27	90	206	151	22730.0130

Halder, Inc.

www.halderusa.com

Application example

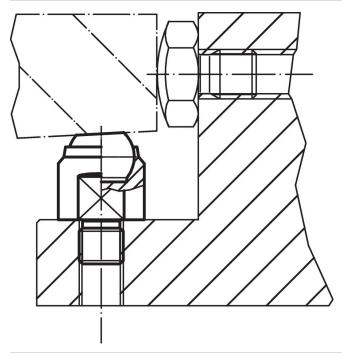

Compliance

RoHS compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Halder, Inc.

Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2

Published on: 4.2.2024