# Eccentric Quick Clamps • with female thread 23390.0003



# **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### **Material**

# Support washer

· Thermoplastic PA, glass-fiber reinforced

· Zinc die-cast, plastic coated, black, similar to RAL 9005

# Threaded part

· Steel, zinc-plated by galvanization


#### Inner parts

• Steel, zinc-plated by galvanization

#### Adjusting nut

• Steel, zinc-plated by galvanization

# **Drawing**

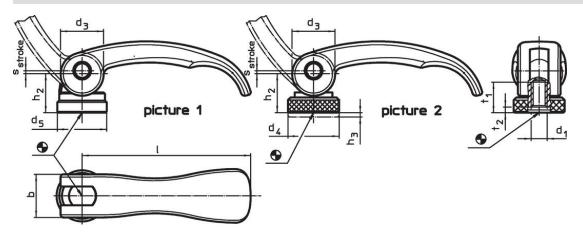

# **Order information**

Dimensions								Stroke		I	Art. No.
I	d₁	d <sub>3</sub>	<b>d</b> <sub>5</sub>	<b>h₂</b> max.	b	t₁	t <sub>2</sub> min. in clamping position	s at 90° lever position	max.		
[mm]								[mm]	[°C]	[g]	
with female thread – picture 1, Steel											
63	M5	16	18.5	16.4	16	13	3	0.75	80	60	23390.0003




Halder, Inc.

www.halderusa.com Page 1 of 2

Published on: 4.2.2024

# **Application example**

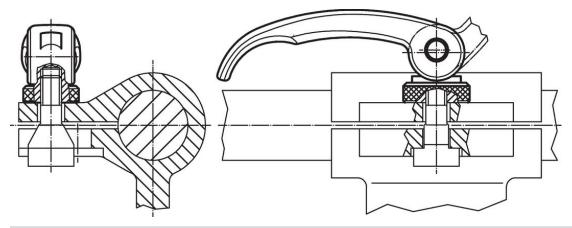

# Compliance

#### **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

#### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

# **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Halder, Inc.

www.halderusa.com Page 2 of 2

Published on: 4.2.2024