# Height-Adjusting Elements • high 25120.0144



## **Product Description**


For levelling of machines and installations.


For vertical adjustment, the self-locking height-adjusting elements are fitted with a fine-pitch thread. All elements have a throughgoing bore for fastening purposes. A turn-out lock serves as height limit for the maximum adjustment height.

### Material

 Heat-treated steel, zinc-plated by galvanization, chromalized

## Drawing

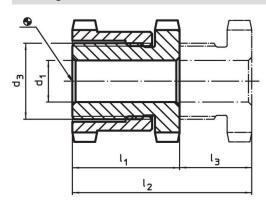




## Order information

Dimensions					Stroke	For screw	Load capacity	Load capacity	Ĩ	Art. No.
d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	l <sub>1</sub>	l <sub>2</sub>	I <sub>3</sub>		for static load	max.	-	
			~	~	~		max.			
	[mm]				[mm]	[mm]	[kN]	[kN]	[g]	
26	70	M50 x 1,5	66	106	40	M24	330	157	1329	25120.0144

### Accessories

sickle spanner for vertica	For height adjusting element size d <sub>2</sub> [mm] al adjustment	Dimensions of sickle spanner DIN 1810, form A [mm]	<b>a</b> (9)	Art. No.
	70	68 – 75	253	25120.0985

## **Application example**

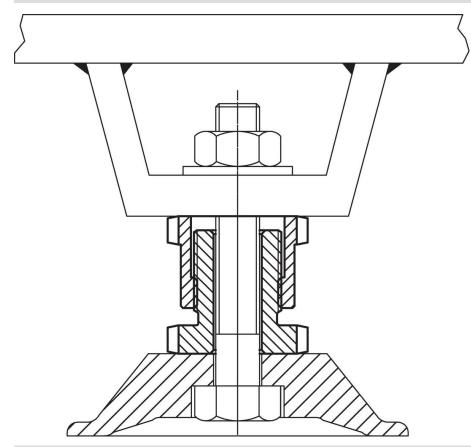

## Compliance

#### **RoHS compliant**

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.