# Height-Adjusting Elements ⋅ high 25120.0146



# **Product Description**


For levelling of machines and installations.


For vertical adjustment, the self-locking height-adjusting elements are fitted with a fine-pitch thread. All elements have a throughgoing bore for fastening purposes. A turn-out lock serves as height limit for the maximum adjustment height.

#### Material

· Heat-treated steel, zinc-plated by galvanization, chromalized

# Drawing





# **Order information**

Dimensions					Stroke	For screw	Load capacity	Load capacity	I	Art. No.
d₁	d <sub>2</sub>	d <sub>3</sub>	I <sub>1</sub>	l <sub>2</sub>	I <sub>3</sub>		for static load	max.	_	
			~	~	~		max.			
[mm]				[mm]	[mm]	[kN]	[kN]	[g]		
33	70	M50 x 1,5	66	106	40	M30	330	53	1167	25120.0146


#### **Accessories**

	For height adjusting element size  d <sub>2</sub>	Dimensions of sickle spanner DIN 1810, form A	Ĭ	Art. No.
sickle spanner for vertical	[mm]	[mm]	[9]	
Stokie Spanner for Vertical	a aqusunent			
	70	68 – 75	253	25120.0985



Halder, Inc. www.halderusa.com

### **Application example**

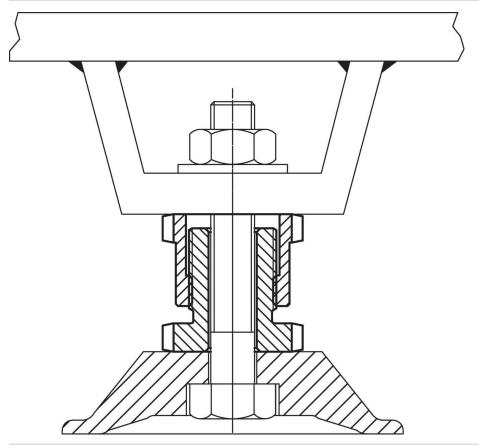

### Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 23.01.2024.

Halder, Inc.

# Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halderusa.com Page 2 of 2

Published on: 4.2.2024