Rubber Metal Buffers • cylindrical

25150.0107



Product Description

To be used for elastic bearing of motors, compressors, pumps etc.

The hardness is 55 \pm 5° shore A. Further shore hardnesses (40 \pm 5° shore A and 70 \pm 5° shore A) on request.

Material

Support washer

Steel, zinc-plated, blue chromated

Threaded bushing

· Steel, zinc-plated, blue chromated


Body

• Rubber natural caoutchouc (NR), black


Screw

• Steel, zinc-plated, blue chromated

Drawing

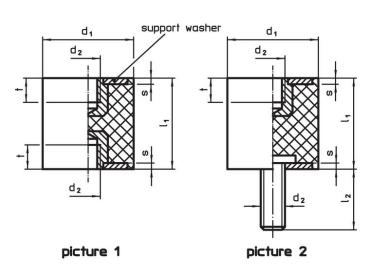


Halder, Inc.



Order information


Dimensions						Spring rate R Load capacity	Spring range			I	Art. No.	
d ₁ ±1.5	l ₁ ±1.5	d ₂	l ₂	s	t ~	~	max.	~	min.	max.		
[mm]						[N/mm]	[N]	[mm]	[°C]		[g]	
with female thread and screw – picture 2												
10	15	M4	10	1.2	4	17	65	3.75	-30	80	2.8	25150.0107

Application example





www.halderusa.com



Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 23.01.2024.

Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Halder, Inc.

www.halderusa.com Page 2 of 2

Published on: 28.4.2024